



ASX Announcement

21 August 2017

Exploration Update – Lithium Brine Projects

Caeneus Minerals Limited (ASX: “CAD” or “the Company”) provides the following exploration update on its 100% owned Lithium Brine Projects in Nevada, USA.

Highlights:

- Assay results received from water samples submitted from the two exploration drill holes at the Lida Valley Project.
- Water encountered determined to be mostly potable with assays returning maximum dissolved solids of 1,360mg/l (ppm).
- Drilling at Columbus Marsh which was temporarily suspended due to unseasonal rainfall has commenced.

Lida Valley:

Two drill holes (LV-2 & LV-4 refer figure 1 below) were completed at the Lida Valley Project as part of the Phase One Drilling Campaign. The drilling targeted sediments of a basin defined by ground gravimetric data and inferred from resistivity data to host lithium rich brines. A total of thirty six samples of intersected waters were submitted for analysis to Wetlab Laboratory in Sparks, Nevada.

Assays have now been received with the waters encountered determined to be largely potable and assays returning maximum dissolved solids of 1,360mg/l (ppm). Prospective brines traditionally contain brines with total dissolved solids in excess of 20,000mg/l. The samples did not display economic quantities of lithium with results below the detection limit of 20mg/l (ppm).

The Company speculates that the resistivity anomalies detected from the surface may be due to volcanic tuff beds but the exact characteristics remain unknown.

The Company will conduct a review and notify the market should any further work commence at the Lida Valley Project.

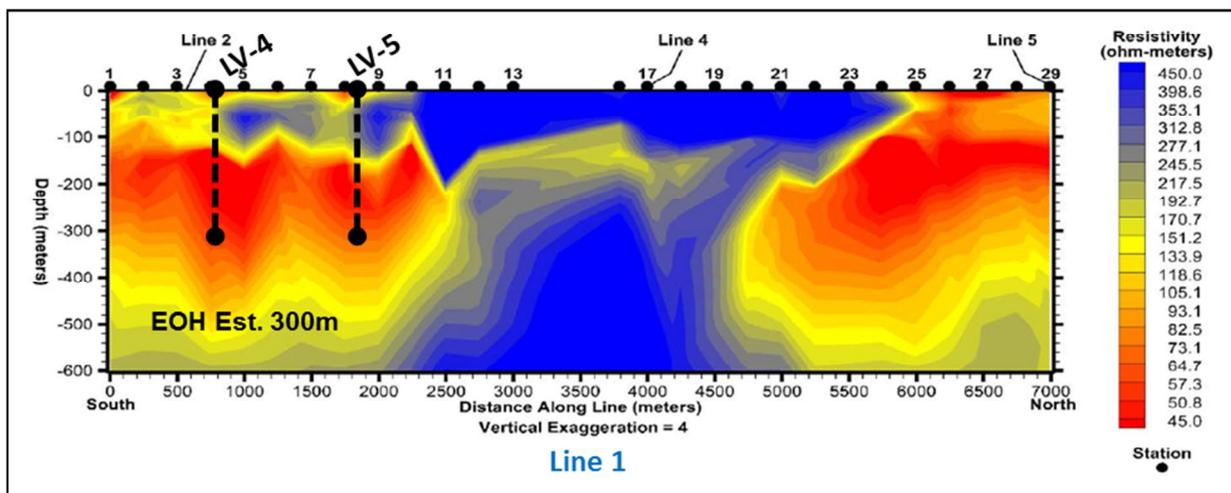
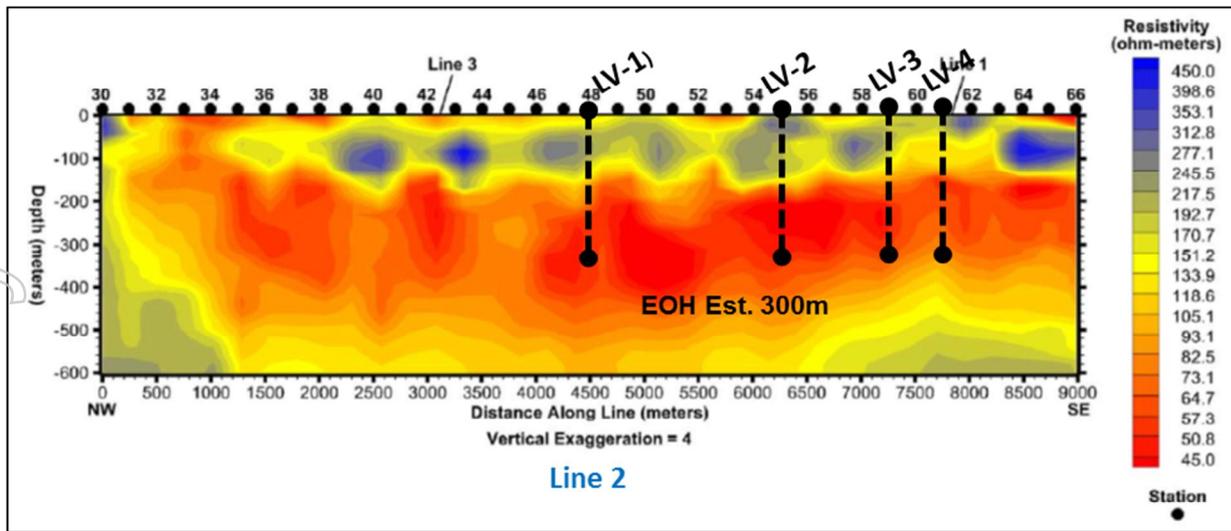


Figure 1: CSAMT Survey & Phase One (LV-2 & LV-4) and Potential Future (LV-1, LV-3 & LV-5) Drill Hole Locations.

Columbus Marsh:

Drilling at the Columbus Marsh Project has now commenced following being temporarily suspended due to the heavy unseasonal rainfall in the area.

The Company is highly encouraged by the potential at Columbus Marsh, and notes the significance of the epithermal systems that surround the large mature tertiary saline basin, indicating that hot springs activity has been an influence.

For personal use only

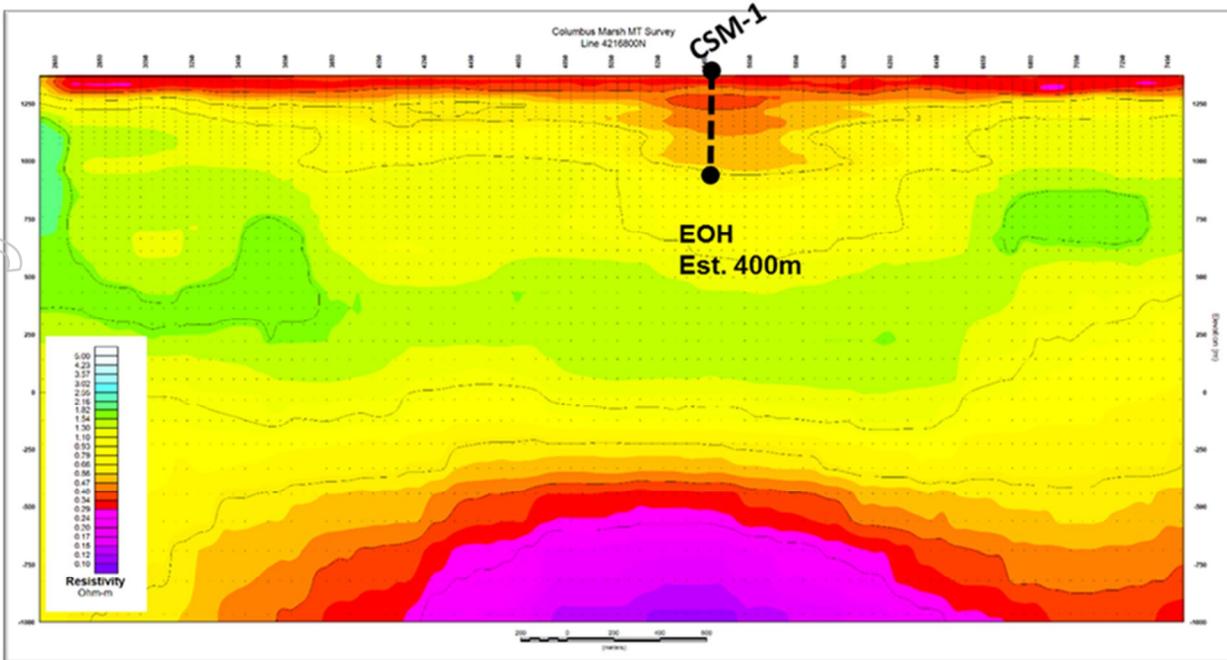


Figure 2: CSAMT Survey & First Planned Drill Hole Location.



Figure 3: Drilling commenced at the Columbus Marsh Project



Figure 4: Site preparation being completed due to the soft ground at the Columbus Marsh Project.

For and on behalf of the Board

Steve Elliott
Managing Director

Competent Person Statement

The information in this announcement that relates to Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Steven Elliott who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Elliott is a director of the Company. Mr Elliott has sufficient experience which is relevant to the style and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Minerals Resources and Ore Reserves. Mr Elliott consents to the inclusion in the announcement of the matters based on his information in the form and context in which it appears.

Appendix 1: Caeneus Minerals Ltd, Lida Valley Project – RC Drilling - JORC Code 2012

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<p>Sample assay results included in this report were done by the hand held LIBS-Z analyser which uses laser spectroscopy to determine element contents in the field.</p> <p>Reverse circulation drilling was used to obtain 5-foot interval samples of drill cuttings.</p> <p>Chip samples were caught under the cyclone in a 5-gallon pail, which was then stirred to ensure entire interval was put into 3-5kg sample bags. Pails were washed between uses.</p> <p>Wetlab Western Environmental Testing Laboratory, Sparks Nevada USA used standard methods for the examination of water and wastewater, online edition. Methods for determination of organic compounds in drinking water, EPA-600/4-79-020 and test methods for evaluation of solid waste, physical/chemical methods (SW846) third edition.</p> <p>Samples analysed by methods EPA 300.0, EPA 200.2, EPA 200.7 and EPA method 9223B.</p>
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<p>Reverse circulation dual tube buggy mounted air drill. Rig pipe is 4 inch matrix with 2.125 inch inner tube in 10 foot lengths for portability. Bottom hole assembly was a journal bearing soft gormatilin bored and skirted tricone bit attached to a matrix face sampling style bladder sub.</p>
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<p>Samples of chips were taken at 5-foot intervals, while water samples were taken at 20 foot intervals. Chips were bagged and chip tray was filled with each interval to match bag. Volumes of recovery were not calculated.</p> <p>Heavy viscous quik gel bentonite and ez mud polymer were constantly pumped down backside of bore hole from surface through 80 feet of casing to minimize sample contamination from upper zones in borehole.</p> <p>Bore hole brine samples were taken from air cyclone during drilling process. Drill progress was not halted for sampling as hole collapse and or sluffing of upper zone could occur with resultant contamination and or stuck drill string. Once a rod was drilled, the rig circulated with air for a sufficient time as to remove rig-water and other contaminants (chips) from the formation waters before a sample was taken.</p> <p>When experiencing low volumes of chip return, foam product was pumped downhole to help bring chips to surface.</p> <p>Minor chip sample bias when drilling unconsolidated silts and clays. Fines stay</p>

For personal use only

Criteria	JORC Code explanation	Commentary
		<p>suspended within rig water/formation waters, and do not typically collect in the bottom of the sample bucket. Fine sieves (200 mesh) were routinely used to check for fines for logging purposes.</p>
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<p>Reverse circulation drill chips were geologically logged.</p> <p>Qualitative descriptions of lithology, colour, texture, grain size, alteration, mineral/grain modal percentages, hardness, rounding, sorting, etc., are recorded for each chip sample interval.</p> <p>Both drill holes are logged in their entirety.</p>
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<p>All samples were taken from cyclone through wet rotating splitter as injection water and chemicals were utilized during entire hole.</p> <p>Chip sample buckets washed thoroughly between each 5-foot interval.</p> <p>Water samples were caught in a 5-gallon plastic pail under the cyclone, once sufficient circulation had removed cuttings and other sources of contamination. The buckets were washed with distilled water between each sample. Flow rates were calculated using a stop watch. Samples were metered immediately upon surfacing within the pail.</p> <p>Water samples intended for lab analysis were taken every 60 feet. Once field metered, they were left for 10 to 15 minutes to settle out sediments to further reduce contamination. Sample bottles were provided by WETLAB of Sparks, Nevada, of whom analyzed the samples. Bottles A, and B were taken for each individual sample. A was for general chemistry, B for metals chemistry. Once bottles were filled the "B" bottle was preserved with 0.5 ml of HNO₃. Bottles were kept in a cooler on site, until brought to a refrigerator to be kept at 4°C. All samples were delivered to the lab within the 7-day holding period required for accurate TDS results.</p>
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<p>The instrument used in the analyses was a hand held LIBS-Z analyser.</p> <p>It must be noted that results are only pertinent for the immediate area of the laser beam and may be inaccurate by up to 20%.</p> <p>Formation water samples were taken every 20 feet and field parameters were taken with a YSI 556 MPS meter. This meter was calibrated on June 12, 2017 by Silverstate Analytical Laboratories in Las Vegas, Nevada. A daily calibration check was done by testing the rig water, to ensure nearly identical values to previous days were maintained.</p>

Criteria	JORC Code explanation	Commentary
		<p>Field duplicates of chip samples are 5% of the total to be analyzed.</p> <p>Distilled blanks were 10% of analyzed water samples, while water duplicates are ~7% of total analyzed samples.</p> <p>At this early point in exploration, WETLAB's QAQC protocols for assay data were largely relied upon.</p>
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<p>Not applicable</p> <p>Not applicable at early stage of exploration.</p> <p>Sample data was collected in the field, and data entry / validation will be done in the office by appropriate geological personnel.</p> <p>No assay data adjustments have been done.</p>
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<p>All LIBS-Z analyses and rock samples were positioned by GPS which is presumed to be accurate to 5 meters.</p> <p>Sample sites were marked with flagging tape.</p> <p>A handheld Garmin GPSMap 62Cs unit on coordinate system UTM NAD 83, Zone 11 was used to survey in drill collars. This had an accuracy of +/- 9 feet.</p>
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<p>Not applicable</p>
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<p>Not applicable</p>
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<p>Water samples always held by company geologist until delivery to laboratory.</p>
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<p>No audits have been completed to date, but both in-house and laboratory QAQC data will be monitored in a batch by batch basis. All protocols have been internally reviewed.</p>

Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<p>A group of mineral claims held by a US subsidiary, wholly (100%) owned by Caeneus Minerals Ltd (LV1-LV131 refer last quarterly report for claims list).</p> <p>The tenure is secure and in good standing at the time of writing.</p>
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<p>Other parties (unknown) have reportedly sampled the tenure area and returned results up to 1,000 ppm lithium. Historical work yet to be verified.</p>
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<p>Caeneus Minerals Ltd is exploring the area for clay-hosted lithium mineralisation associated with the Tertiary Horse spring Formation.</p>
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<p>Appropriate information has been included in the report.</p> <p>Drill hole collars were surveyed in with a Garmin GPSMap 62Cs, which had an accuracy of +/- 9 feet.</p> <p>Coordinates were taken in UTM NAD 83, Zone 11.</p> <p>Drill hole LV17-02 collar location: Easting: ;Northing: ;Elevation: ;Depth: 950 ft</p> <p>Drill hole LV17-04 collar location: Easting: ;Northing: ;Elevation: ;Depth: 1000 ft</p> <p>Hole dips were -90°; negating azimuth</p>
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<p>All results listed are as obtained. No cut-offs were used and no aggregation of values.</p> <p>No data aggregate methods were applied to the results.</p>
Relationship	<ul style="list-style-type: none"> These relationships are particularly 	<p>No drilling was completed to enable any</p>

For personal use only

Criteria	JORC Code explanation	Commentary
between mineralisation widths and intercept lengths	<p>important in the reporting of Exploration Results.</p> <ul style="list-style-type: none"> If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<p>relationship between mineralisation width and intercept lengths.</p> <p>Drilling was completely exploratory, with intension of correlating geophysical data to rock chips, and water salinities for further exploration.</p>
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<p>Appropriate diagrams are included in the report.</p> <p>Comprehensive reporting of all results.</p>
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<p>All sample results are reported where significant.</p>
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<p>No other relevant data has been reported.</p>
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<p>Appropriate information has been included in the report.</p>

For personal use only